DESIGN BY NAOTO FUKASAWA

HAY

PAO STEEL PENDANT



HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection
- The collection includes a portable lamp, as well as pendants, table and floor lamps in different sizes in high-gloss steel or glass
- Pao Steel Pendant is an elegant, suspended light with high-gloss steel shade that emits a functional yet ambient glow
- Designed for use with a replaceable standard retro fit LED dimmable bulb
- The fitting can be used in conjunction with a number of standard wall-mounted dimming control units
- The lamp is suitable for both private and office environments
- Qualified for contract use

PAO STEEL PENDANT
DESIGN BY NAOTO FUKASAWA

An exciting collaboration with Japanese designer Naoto Fukasawa, the Pao Steel Pendant is named after the soft, glowing shape of traditional Mongolian Pao tents. By keeping the aesthetics modest and simple Fukasawa creates a beautiful everyday object that is in harmony with its environment. The light source is concealed from view within the shade, resulting in a clean and simple design with no visual intrusions. The pendant's shades are crafted from steel with a high-gloss finish and are available in different sizes and colours. Their functionality and the deliberate simplicity of the design make them suitable for a wide range of spaces and uses in domestic and corporate environments.

Naoto Fukasawa founded NAOTO FUKASAWA DESIGN in 2003. Renowned for designs that express the essential nature of objects, he works with leading global brands as well as Japanese companies. He serves on MUJI's design advisory board, is art director of Maruni, and works across fields ranging from electronics to furniture and interiors. Fukasawa is a professor at Tama Art University, curator of The Japan Folk Crafts Museum, and a director of 21_21 Design Sight. His honors include Royal Designer for Industry and the Isamu Noguchi Award. For HAY, he designed the Pao Lamp Collection and Miz Water Bottle.



Naoto Fukasawa



Pao Steel Pendant 350 | Cream white



Pao Steel Pendant 470 | Soft black



Pao Glass Pendant 470 | Cream white



Pao Steel Pendant 470 | Cool grey



MATERIALS

SHADE
Pressed steel with a high-gloss wet spray finish

DIFFUSER
Injection moulded opalescent acrylic (PMMA)

CORD
Braided fabric cable with a silicone insulation

PRODUCT INFORMATION

DESIGN YEAR
2020


COUNTRY OF ORIGIN
China

COLOUR & FINISH


COLOUR \ SIZE	Ø230 mm	Ø350 mm	Ø470 mm
Soft black	●	●	●
Cream white	●	●	
Red	●		
Cool grey	●	●	●

Please note that the cable is black for all colour options.


DIMENSIONS



PAO STEEL PENDANT 230
Diameter 23 cm
Height 10 cm
Weight 1,1 kg



PAO STEEL PENDANT 350
Diameter 35 cm
Height 14,5 cm
Weight 2,2 kg

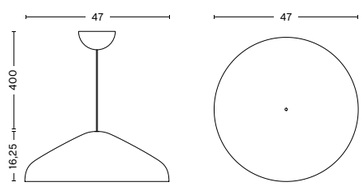

PAO STEEL PENDANT 470
Diameter 47 cm
Height 16,25 cm
Weight 3,34 kg



PAO STEEL PENDANT 230

TECHNICAL SPECIFICATION

RECOMMENDED LIGHT SOURCE
2 x LED G9, 3-5W (max. 5W), 300-600lm, 2700-3000K warm white
Bulbs not included

DIMMABLE
Yes
If used in conjunction with a wall mounted dimmer and suitable LED bulb

POWER SUPPLY
220-240V AC at 50/60Hz

IP
20

CORD LENGTH
400 cm

SWITCH
No

TEST SPECIFICATION OUTPUTS


Photometrics and the test specification shown is taken using the recommended LED bulbs fitted in the production luminaire

LUMEN (LM)
495lm
(Taken with 2 x LED G9 bulbs)

KELVIN (CCT)
2700K, warm white

CRI (1-100)
80

PHOTOMETRICS





PAO STEEL PENDANT 350

TECHNICAL SPECIFICATION

RECOMMENDED LIGHT SOURCE
2 x LED E14 (A15 or B35), 5-8W (max. 8W), 500-800lm, 2700-3000K warm white
Bulbs not included

DIMMABLE
Yes
If used in conjunction with a wall mounted dimmer and suitable LED bulb

POWER SUPPLY
220-240V AC at 50/60Hz

IP
20

CORD LENGTH
400 cm

SWITCH
No

TEST SPECIFICATION OUTPUTS


Photometrics and the test specification shown is taken using the recommended LED bulbs fitted in the production luminaire

LUMEN (LM)
816lm
(Taken with 2 x LED E14 bulbs)

KELVIN (CCT)
2700K, warm white

CRI (1-100)
80

PHOTOMETRICS





PAO STEEL PENDANT 470

TECHNICAL SPECIFICATION

RECOMMENDED LIGHT SOURCE
2 x LED E27 (A19), 10-13W (max. 13W), 1000-1500lm, 2700-3000K warm white
Bulbs not included

DIMMABLE
Yes
If used in conjunction with a wall mounted dimmer and suitable LED bulb

POWER SUPPLY
220-240V AC at 50/60Hz

IP
20

CORD LENGTH
400 cm

SWITCH
No

TEST SPECIFICATION OUTPUTS


Photometrics and the test specification shown is taken using the recommended LED bulbs fitted in the production luminaire

LUMEN (LM)
1513lm
(Taken with 2 x LED E27 bulbs)

KELVIN (CCT)
3000K, warm white

CRI (1-100)
85

PHOTOMETRICS



CERTIFICATES

CE APPROVED
This product has been assessed and complies with the essential requirements of the relevant European directives.

LED IP20

Tested according to the following European EN IEC standards which relate specifically to electrical lighting products including.

· EN 60598-2-1 (portable luminaires)
· EN 60598-1 (general requirements)

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Digital Library at hay.com.
LINK TO DIGITAL LIBRARY

